


Crystal Clear Heat Shrink Butt Connectors

Stock No.	Wire Range	Tubing Color	Stripes on Connector	Length	Type	Seam
30782	12-10	Clear	Yellow	1.5"	Window	Seamless
30783	16-14	Clear	Blue	1.5"	Window	Seamless
30784	22-18	Clear	Red	1.5"	Window	Seamless

Features:

- Clear adhesive-lined heat shrink tubing over butt connectors
- Waterproof seal
- Optimal clarity for visual inspection
- Cross-linked ionic polymer tubing material
- Shrink Ratio: Exceeds 2.5:1
- Shrink/Recovery Temperature: 194°F (90°C)
- Continuous Operating Temperature: -67°F (-55°C) to 257°F (125°C)
- Flammability: Passed (FMVSS 302 test)
- Tensile Strength: 4,000 psi
- Longitudinal Change: +1/-10% Max
- Dielectric Strength: 750 V/Mil (30KV/MM)
- Color-coded stripes on butt connectors also indicate/guide the installer to the proper crimp position on the center of the barrel
- Seamless barrel butt connectors ensure superior crimp performance
- Wire-stop in butt connectors prevents over-insertion of wire.
- Window in center of connector assures that wire is seated properly and that the wire is being crimped to the connector

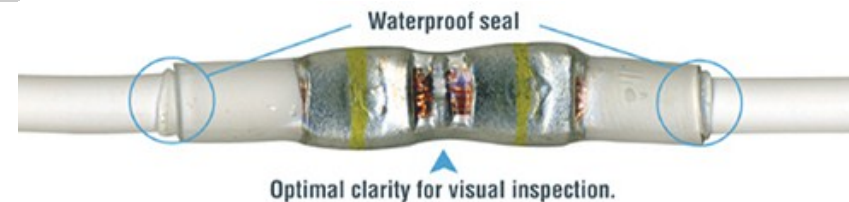

Crystal Clear Heat Shrink Connectors offer visual assurances:

- Ensures the wire is crimped to connector
- Ensures the center of crimp barrel is properly crimped
- Crystal Clear waterproof insulation allows for indisputable inspection of the wire's condition

UNCONTROLLED DOCUMENT

All Information Provided by Manufacturer
Updated 04/27/2011

www.waytekwire.com
Phone | 800.328.2724 | 952.949.0765
Fax | 800.858.0319 | 952.949.0965