


Multilink Sealed Ring Terminals

| Stock No. | Wire Range | Stud Size | Tubing Color | Tubing ID | L Minimum | L Maximum | W (±.05) |
|-----------|------------|-----------|--------------|-----------|-----------|-----------|----------|
| 30953 | 20-18 | 10 | Red | .227 | 1.198 | 1.502 | .31 |
| 30954 | 20-18 | 1/4 | Red | .227 | 1.350 | 1.775 | .47 |
| 30956 | 20-18 | 3/8 | Red | .227 | 1.398 | 1.775 | .56 |
| 31953 | 16-14 | 10 | Blue | .255 | 1.160 | 1.502 | .31 |
| 31954 | 16-14 | 1/4 | Blue | .255 | 1.350 | 1.775 | .56 |
| 31955 | 16-14 | 5/16 | Blue | .255 | 1.379 | 1.775 | .56 |
| 31956 | 16-14 | 3/8 | Blue | .255 | 1.398 | 1.775 | .56 |
| 32953 | 12-10 | 10 | Yellow | .320 | 1.217 | 1.502 | .38 |
| 32954 | 12-10 | 1/4 | Yellow | .320 | 1.360 | 1.764 | .59 |
| 32955 | 12-10 | 5/16 | Yellow | .320 | 1.417 | 1.764 | .59 |
| 32956 | 12-10 | 3/8 | Yellow | .320 | 1.426 | 1.764 | .59 |

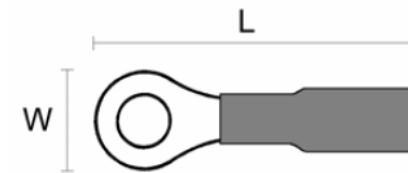

Features:

- “Crimp-solder-seal”
- Bare Terminal Material: Copper, Electro tin plated
- Solder Material: 50SN/32PB/18CD, 2-3% RMA Flux Coating, 295°F (145°C) Melting Temperature
- Tubing Material: Multiple wall polyolefin, meltable, integral inner wall
- 275°F (135°C) Melting Temperature
- -67° F (-55°C) to 230°F (110°C) Operating Temperature
- Tensile Strength: 2200 PSI
- Ultimate Elongation: 400%
- Secant Modulus 2%: 27,000 PSI
- Specific Gravity: 1.0
- Non-Corrosive