

# SERIES 22X ATC® CIRCUIT BREAKERS

**ATC® CIRCUIT BREAKERS**  
Auto, Modified, & Manual Reset

## SPECIFICATIONS

### Single Pole Thermal Type Breakers

**Rating:** 5-30A, 14VDC; 28VDC (Series 223 & 226).

**Interrupt Rating:** 150A @ 14VDC (5-10A versions); 225A @ 14VDC (15A version); 300A @ 14VDC (20A version); 450A @ 14VDC (25-30A versions).

**Operating Temperature Rating:** -40°F (-40°C) to 185°F (85°C).

**Storage Temperature Rating:** -40°F (-40°C) to 260°F (125°C).

**Materials:** UL-Rated 94V-0 thermoplastic housing with gold metal cover (Type I) or silver metal cover (Type II & III).







**Marking:** Standard marking includes amp/volt ratings, part number, and date code. Type III reset buttons are color-coded to amperage ratings. Push-to-trip option is available on manual reset version. OCR marking is available.

**Termination:** Compatible with 280 Type or ATC® fuse blocks.


**Compliances:** SAE J553.





## Dimensions (Dims. shown are for reference only. Consult factory for latest prints.) Terminal Options

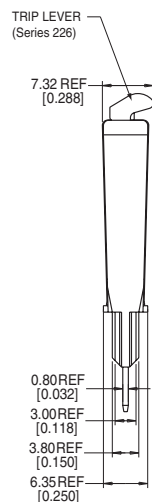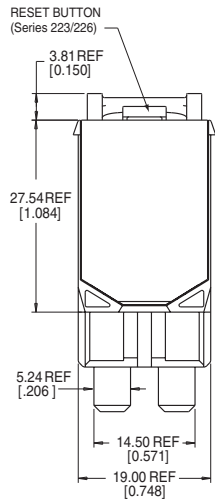

## ATC® Circuit Breaker Puller Part Number 32003



See page 27 for more information.

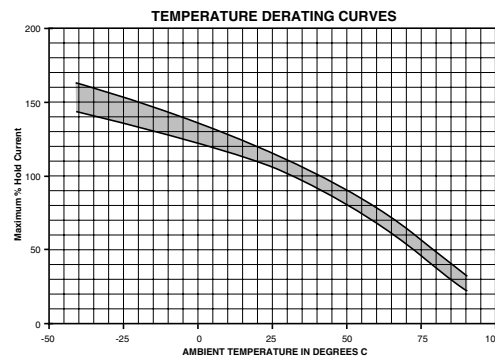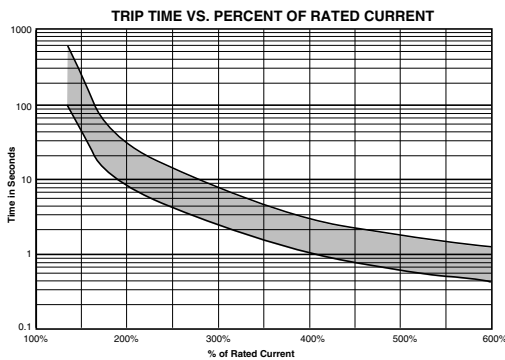

## PART NUMBERING SYSTEM

### Series



- 221 - Type I, 14VDC
- 222 - Type II, 14VDC
- 223 - Type III, 28VDC
- 226 - Type III w/Push-to-trip option, 28VDC

Consult factory for terminal option availability.

### Rating



- 05 - amps [LT. Brown (Tan)]\*
- 75 - 7.5 amps [Brown]\*
- 10 - 10 amps [Red]\*
- 15 - 15 amps [Blue]\*
- 20 - 20 amps [Yellow]\*
- 25 - 25 amps [White]\*
- 30 - 30 amps [Green]\*

\*Reset Button Color (223 & 226 only).

### Terminal



- 0 - ATC® Fuse, 4mm Insertion Depth
- 2 - 8.1mm Centerline 280 (MINI)
- 3 - ATC® Fuse, Delphi Packard Autofuse Block (e.g. 12004943)
- 4 - ATC® Fuse, Blocks with Raised Shrouds, 6.4mm Insertion Depth

### Marking



- 00 - Std. Marking (Consult factory for special marking options)