


# Standard Automotive Lugs / Eyelets

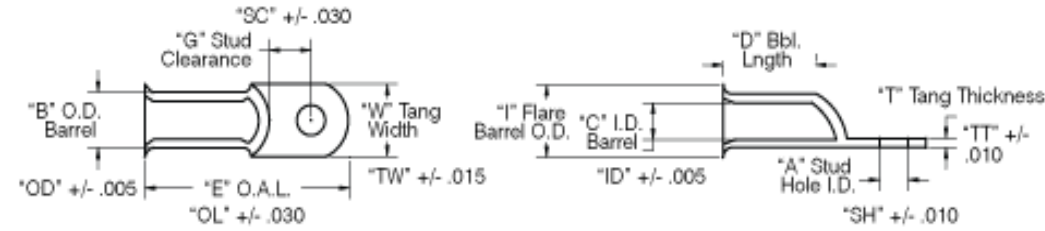

Char.				Stud Hole ID "A" Barrel OD "B" Bbl. Flare OD "I" Barrel ID "C" Bbl. Length "D" Overall Length "E" Tang Length "F" Tang Width "W" Tang Thickness "T" Stud Clearance "G"										
Tin	Bare	AWG Gauge	Nominal Stud Size	Tolerance										
				+/- .010	+/- .010	+/- .010	+/- .010	+/- .030	+/- .060	+/- .060	+/- .030	+/- .010	+/- .030	
36481	36081	8	1/4	0.260	0.250	0.285	0.186	0.270	1.130	0.640	0.465	0.050	0.375	
36482	36082	8	5/16	0.325	0.250	0.285	0.186	0.270	1.130	0.640	0.465	0.050	0.375	
36483	36083	8	3/8	0.400	0.250	0.285	0.186	0.270	1.130	0.640	0.570	0.045	0.375	
36471	36071	6	1/4	0.260	0.307	0.342	0.232	0.425	1.320	0.640	0.540	0.060	0.390	
36472	36072	6	5/16	0.325	0.307	0.342	0.232	0.425	1.320	0.640	0.540	0.060	0.390	
36473	36073	6	3/8	0.400	0.307	0.342	0.232	0.425	1.320	0.640	0.540	0.060	0.390	
36461	36061	4	1/4	0.260	0.376	0.410	0.286	0.475	1.510	0.660	0.545	0.075	0.390	
36462	36062	4	5/16	0.325	0.376	0.410	0.286	0.475	1.510	0.660	0.545	0.075	0.390	
36463	36063	4	3/8	0.400	0.376	0.410	0.286	0.475	1.510	0.660	0.570	0.075	0.390	
36400	36065	2	1/4	0.260	0.437	0.472	0.336	0.525	1.690	0.690	0.650	0.100	0.410	
36401	36001	2	5/16	0.325	0.437	0.472	0.336	0.525	1.690	0.690	0.650	0.100	0.410	
36402	36002	2	3/8	0.400	0.437	0.472	0.336	0.525	1.690	0.690	0.650	0.100	0.410	
36403	36003	2	1/2	0.515	0.437	0.472	0.336	0.525	1.690	0.690	0.750	0.090	0.365	
36410	36010	1	1/4	0.260	0.460	0.495	0.360	0.575	1.710	0.690	0.645	0.100	0.425	
36411	36011	1	5/16	0.325	0.460	0.495	0.360	0.575	1.710	0.690	0.645	0.100	0.425	
36412	36012	1	3/8	0.400	0.460	0.495	0.360	0.575	1.710	0.690	0.675	0.095	0.425	
36413	36013	1	1/2	0.515	0.460	0.495	0.360	0.575	1.710	0.690	0.750	0.090	0.365	